




# Samsung Galaxy Tab S2 9.7 Verizon Tablet Battery Replacement

Use this guide to replace the battery on a Samsung Galaxy Tab S2 9.7 Verizon Tablet

Written By: Divya Prabakaran

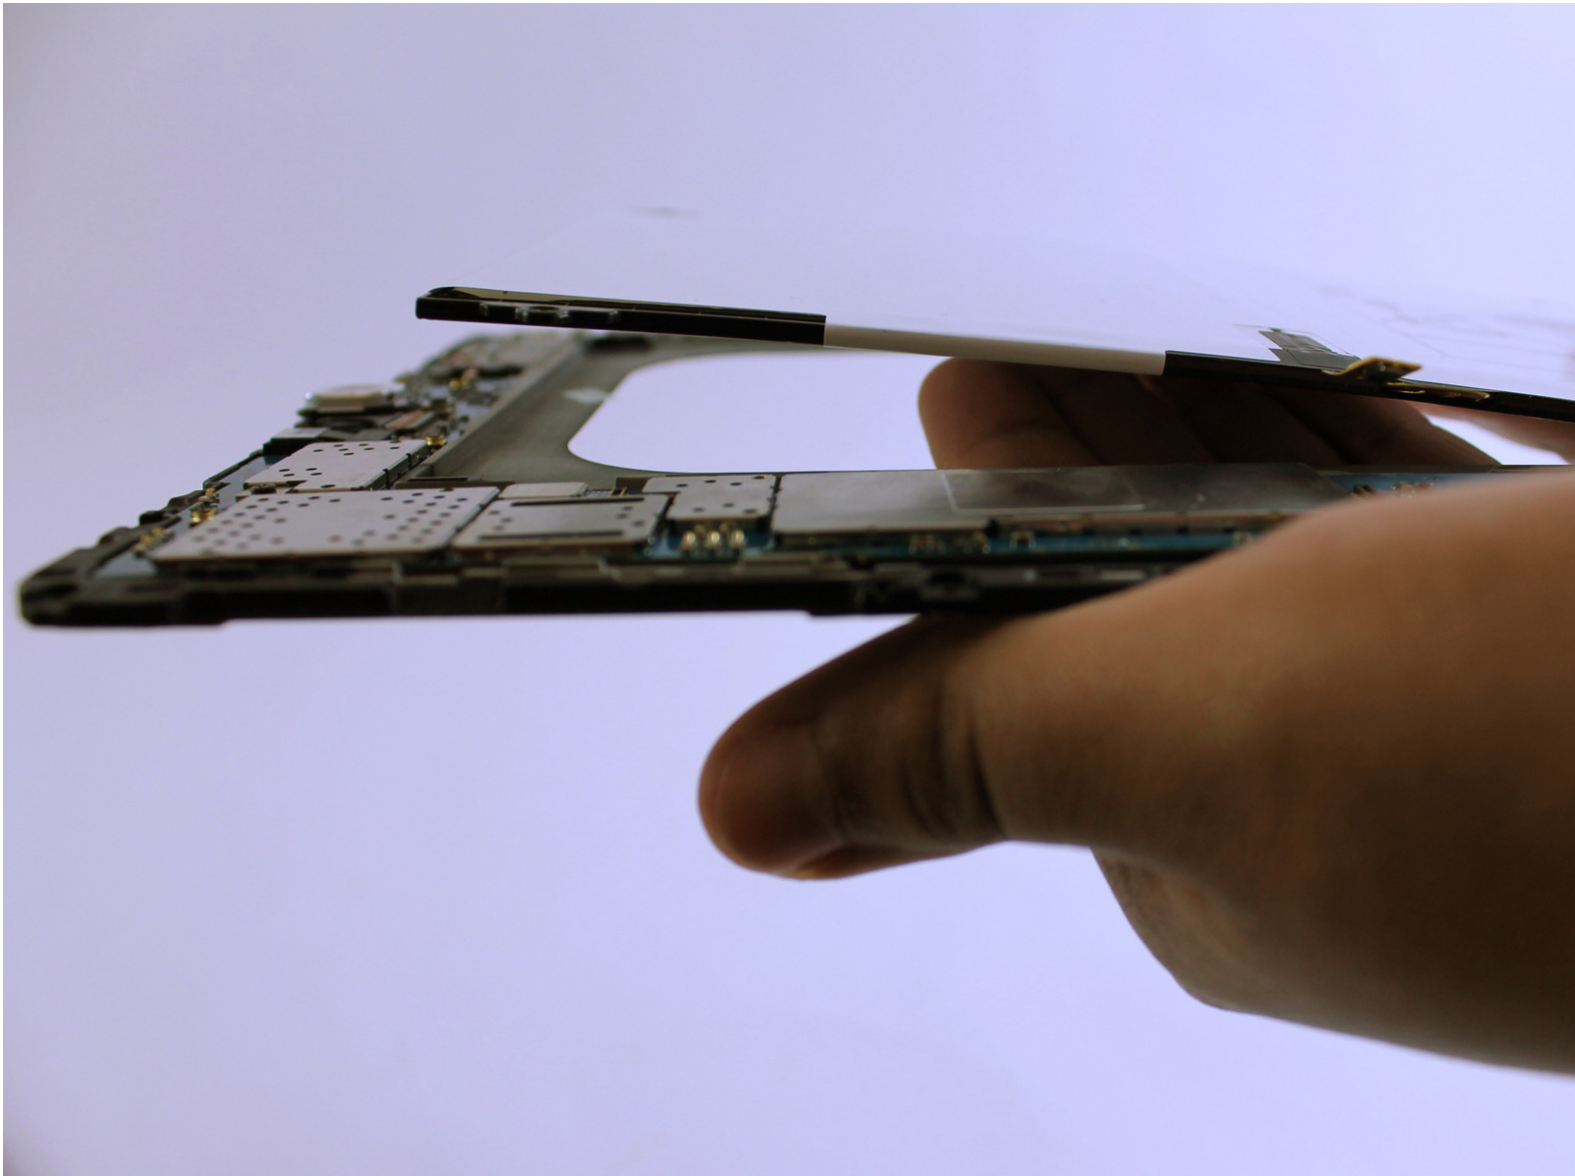

## INTRODUCTION

Is your tablet dying quickly or not charging at all? Your battery may need to be replaced. Follow this guide and you'll know exactly how to do it!


---



### TOOLS:

- [Precision Tweezers Set](#) (1)
  - [iOpener](#) (1)
  - [Suction Handle](#) (1)
  - [Metal Spudger Set](#) (1)
  - [Philips Head Screwdriver: Sized PH000](#) (1)
-


## Step 1 — Back Case

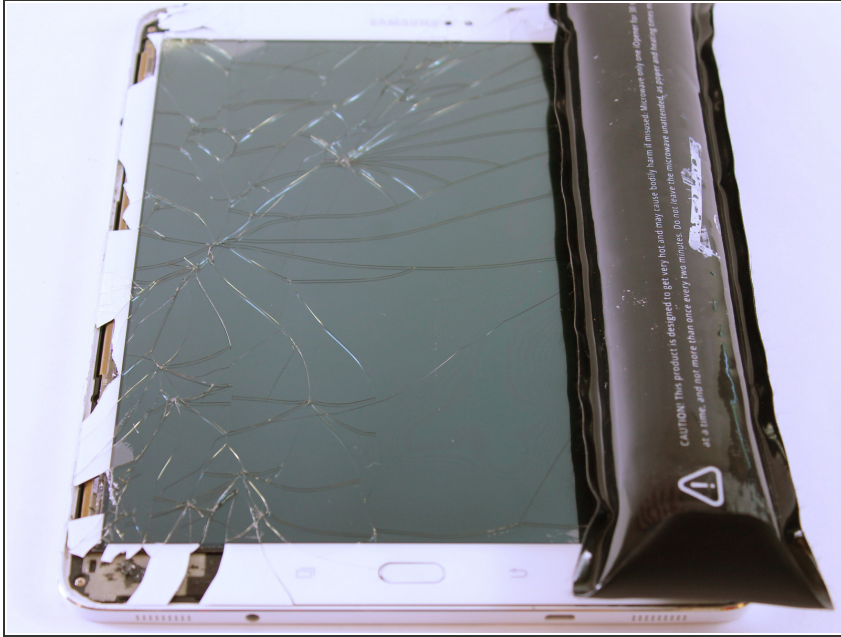

⚠ Turn off the tablet before disassembly.

- Heat up an iOpener for 30 seconds and place on all four seams of the screen. A heat gun can be used as well.

## Step 2

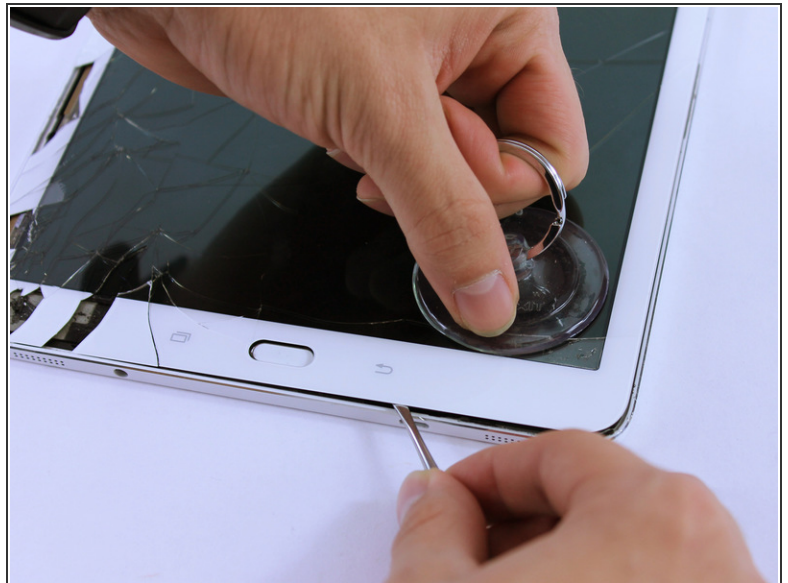


- The glue is now melted, so using the metal spudger shown, pry open all sides of the tablet.
- When prying open near the home and touch screen buttons, use a suction cup.

⚠ Do not stick the metal spudger past these buttons as this may damage your device.




## Step 3

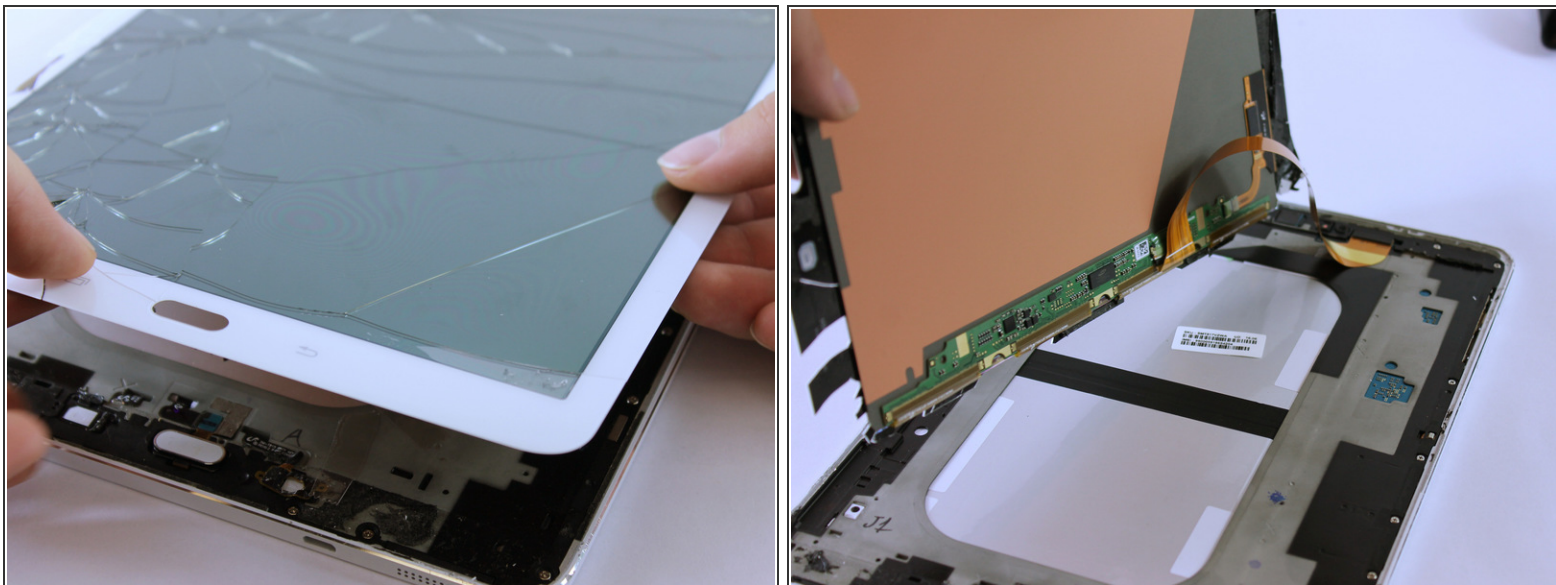

- Carefully lift up the screen.

⚠ There is a ribbon cable attached. Lifting the screen too quickly can damage the cable.


## Step 4

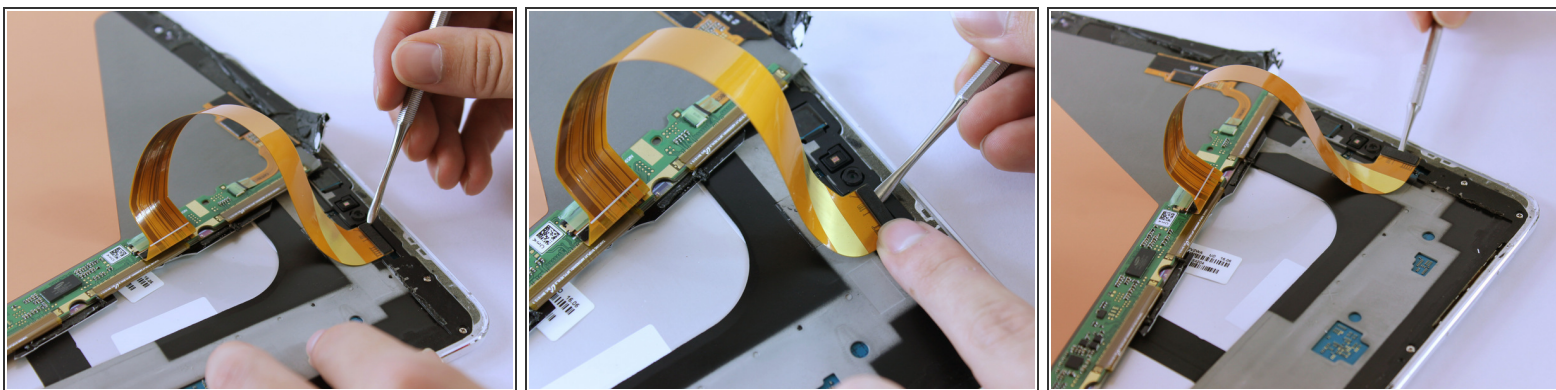

- Remove the ribbon cable using the Metal Spudger.




**i** The ribbon may be taped underneath to the grey frame. Gently lift the ribbon to untape it.

## Step 5

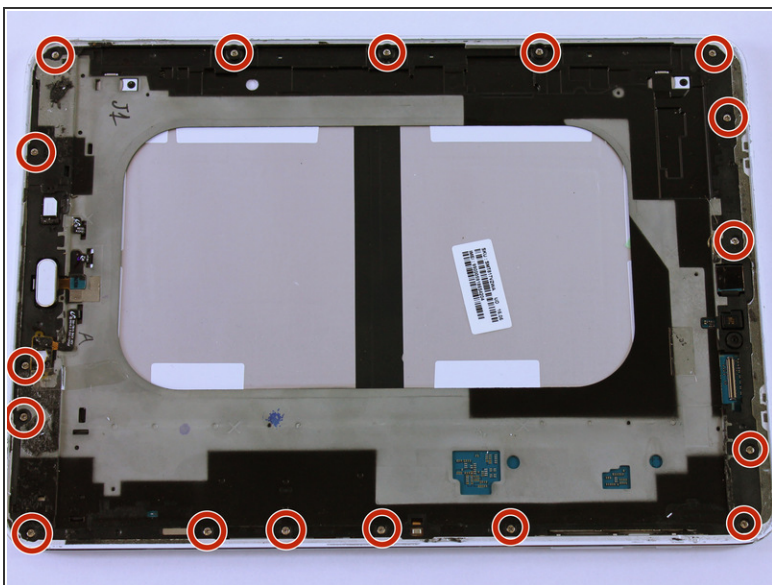

- Remove all seventeen 3 mm screws using a PH000 Phillips screwdriver.


## Step 6

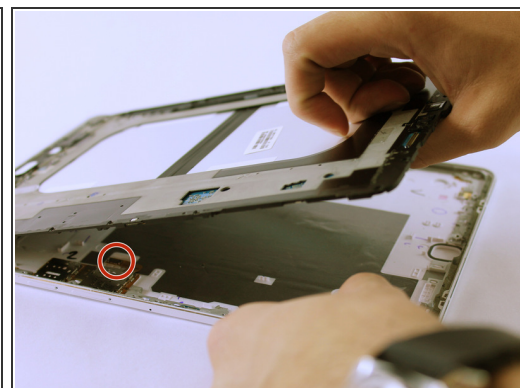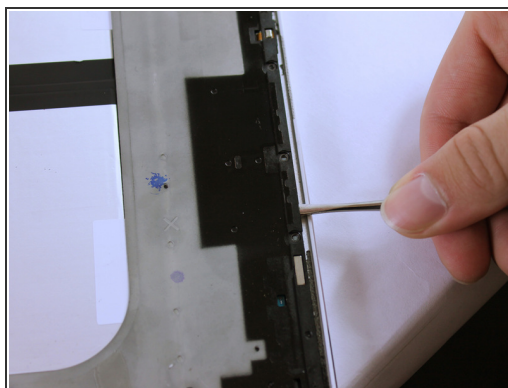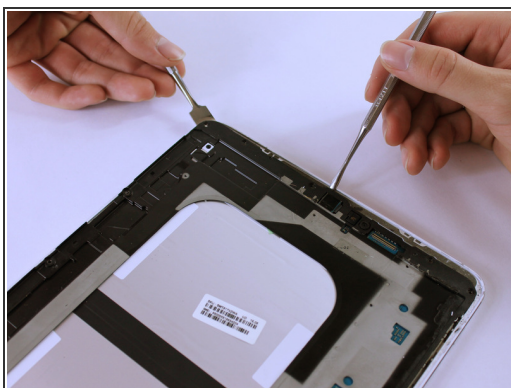

- Lift the black frame using the two Metal Spudgers shown.
- ⓘ On the third picture, there is a Sim Card component that is connected to the frame and back cover. As you lift up the frame, it'll detach. This is normal.






## Step 7

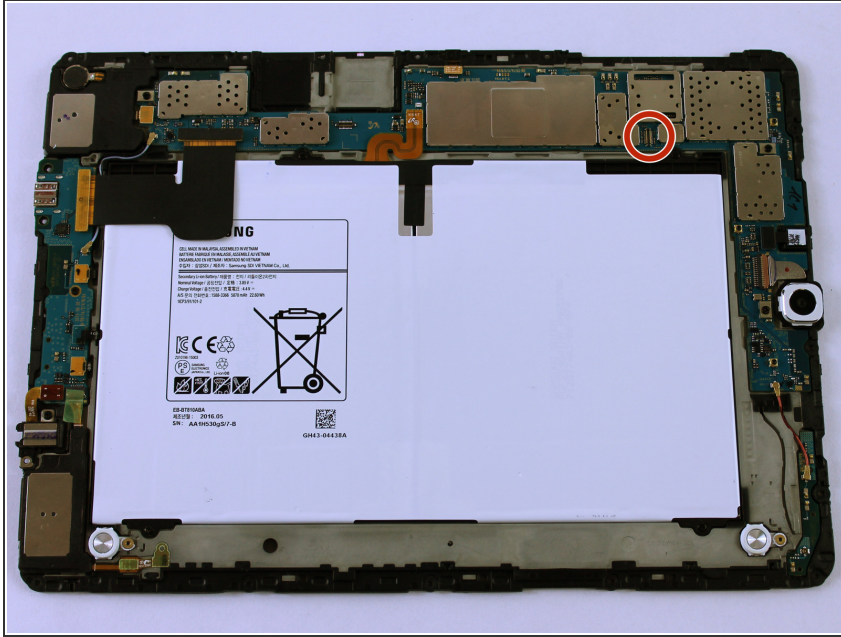


- Once lifted, flip the grey frame over.
- This component connects to the sim card.
- ☑ Remember to click this component back into place when reassembling the tablet.

## Step 8 — Battery

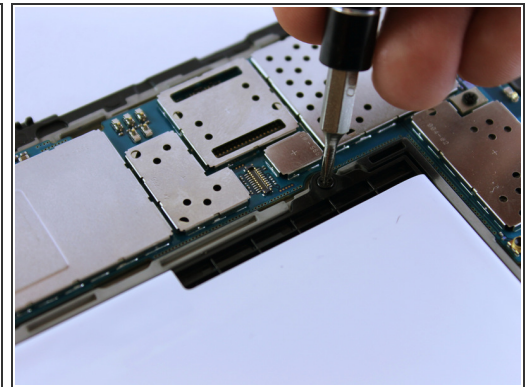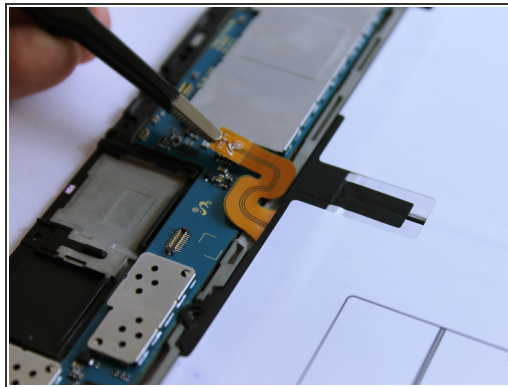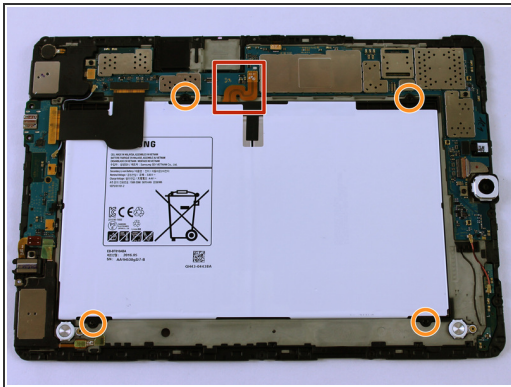

- Unclip the orange ribbon cable located above the battery using the Blunt ESD Tweezer.
- Remove the four black 3mm screws using a PH000 Phillips screwdriver.

## Step 9

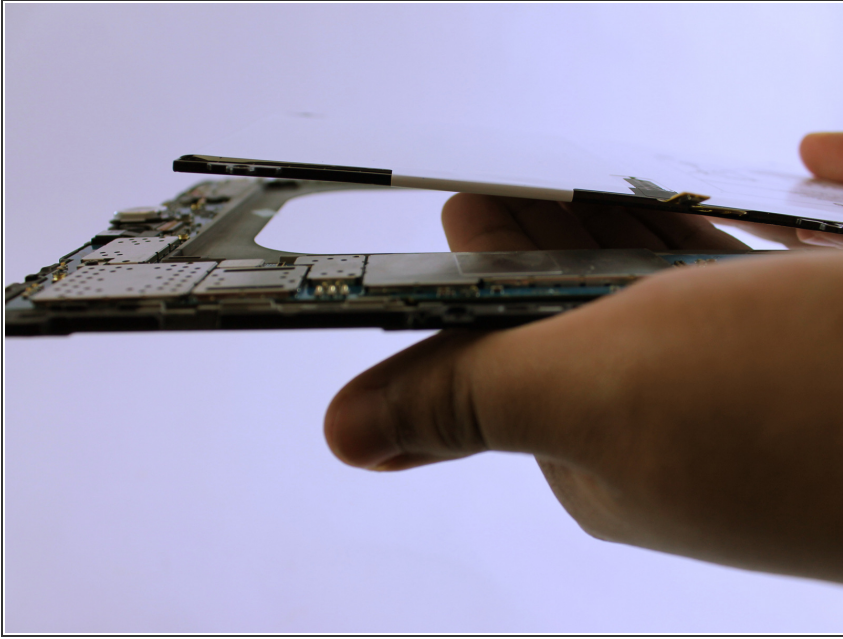

- Hold the frame and pop the battery off from the other side.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-29 11:00:58 AM.